




## Flexible Hose Installation



\*For torque specifications, contact Norman G Clark

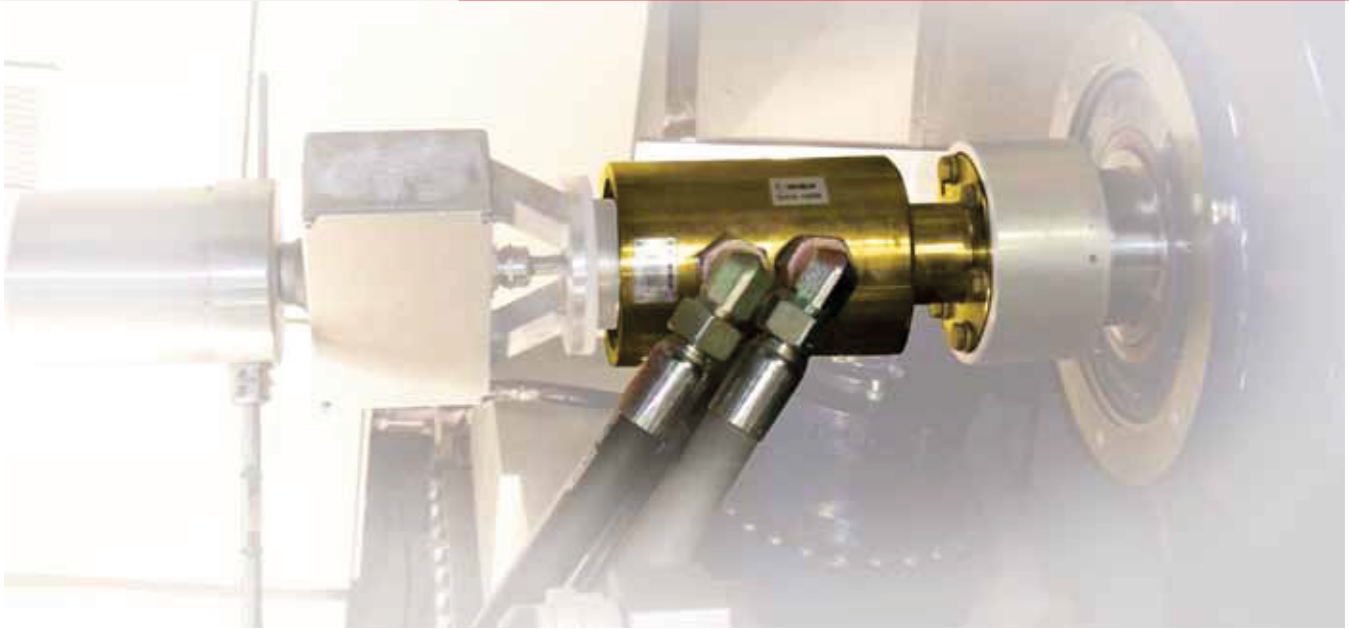

## Other Considerations

**Dirt:**

Handle the rotating union and/or hydraulic devices with extreme caution to ensure cleanliness. (ISO 4406, 17/15/12)

**Tools:**

Use only appropriate tools.

**Connections:**

Ensure that the threads and/or flanges are of proper size, quality and surface finish.

**Transportation:**

To avoid dirt contamination, the holes in the union must be completely protected/plugged before moving.

**Leakage:**

If leakage occurs, verify that the leakage is not from the incorrect adjustment of other elements before dismounting the rotating union.

**Recommendation:**

Hydraulic devices, including rotating unions, have a longer service life if they are not adjusted and handled frequently. Therefore, do not dismount the rotating union unless it is absolutely necessary.